(unit:mm)

BCL-150X15x

2 x M2 x 6
(For optional parts)

2 x M2 nut slots
(For installation)

A

16

(20)

163

151 (Emitting area)

6

20

10

3

157

15 (Emitting area)

2.5

20

10

M3 x 5
On both sides
(For installation)

10

To Lighting

Cable length 500mm

(30)

To camera
(Refer to camera specifications)

CSLP

(66.2)

Nut slot detail diagram

2.6

1

2.9

1.7

5.1

A
(5 : 1)

Note
When powering the camera through a BC Light product,
please refer to the respective camera's specification sheet.

10
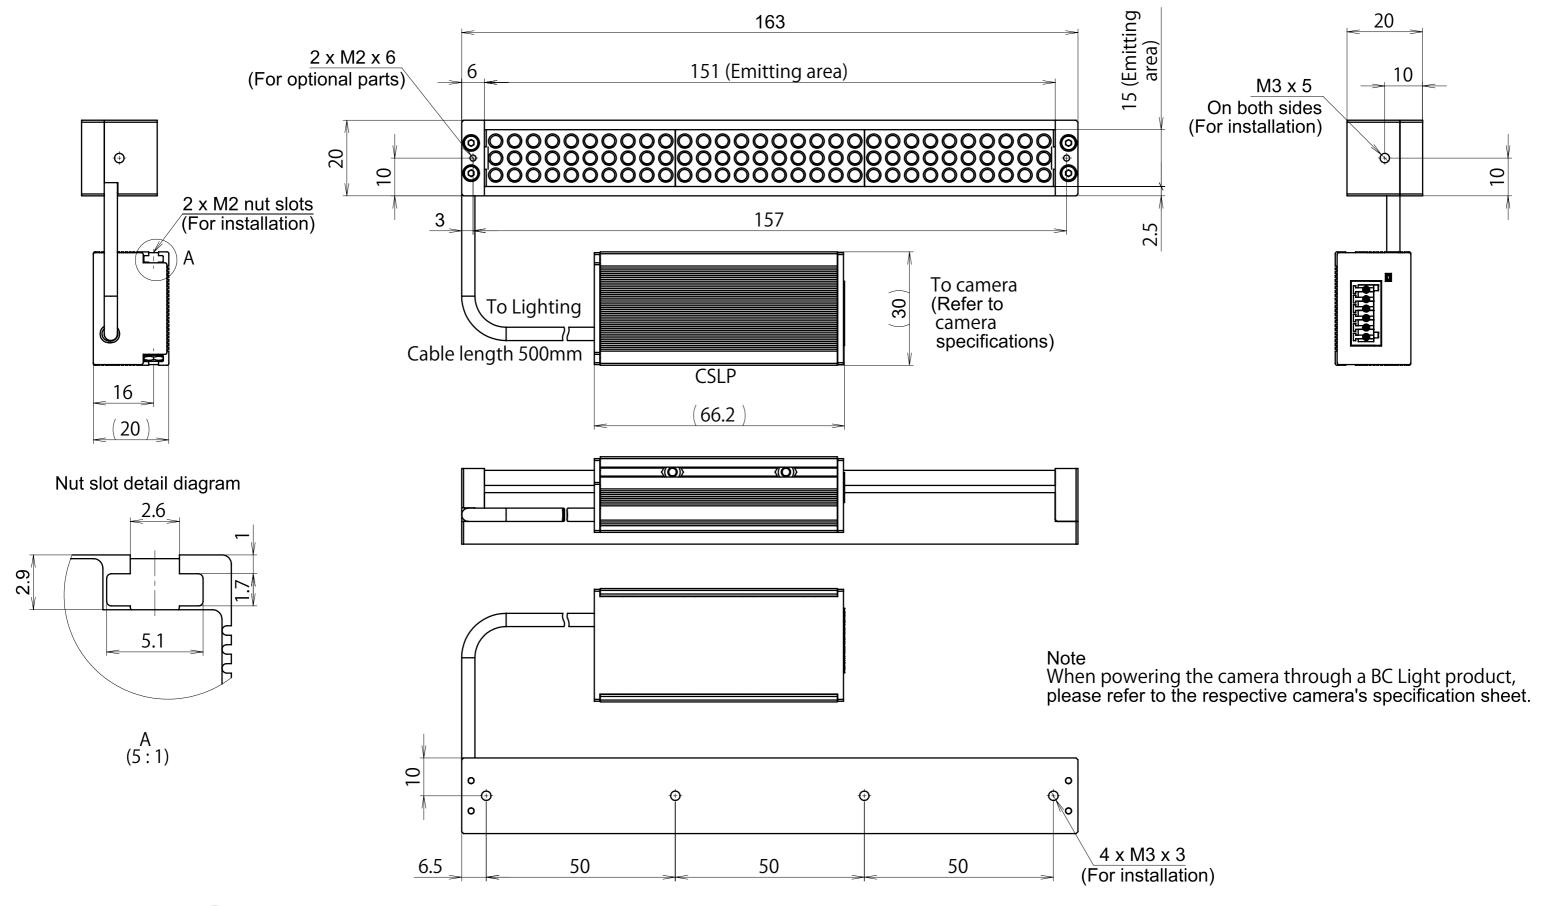
6.5

50

50

50

4 x M3 x 3
(For installation)

x=R/B/W
Input Voltage: DC24V
Power Consumption: 4.6W (R,B)
7.8W (W)